



# BFT-400 SINGLE BUTTERFLY TABLE

*Engineered for LGS & timber frame production.*

A safe and efficient solution for handling large panels within the factory environment.

With the use of pneumatic clamps to secure the panels, the table can raise panels from a horizontal to a vertical position, allowing for easy offloading, storage, or transport.

The heavy-duty frame allows control throughout the lifting process, with no need for cranes!

## Move Smarter, Manufacture Faster



### Supports Lean Manufacturing

Reduces wasted motion, unnecessary lifting, and idle time between process steps.



### Improved Ergonomics & Safety

Reduced manual handling of the product which minimizes strain on operators.



### Modular Configuration

Easily add or remove sections to suit your product size.



### Increased Accuracy in Assembly


Flat, rigid tables ensure accurate squaring and alignment during framing or panel joining.





## BFT-400 TECHNICAL SPECIFICATIONS

Number of Operators	Single Operator Machine
Lift Speed	30 seconds
Air Supply	Minimum 4 bar
Power Supply	415 V / 3Ph
Max Load	2 tonne
Roller Ø	60mm
Framing Size	Single Phase, 110V -240V
Working Height	625mm
Control	Manually operated hydraulics/pneumatics
Modular Section Size	3000mm
Machine Footprint	12250mm (L) X 3500mm (W) x 825mm (H)

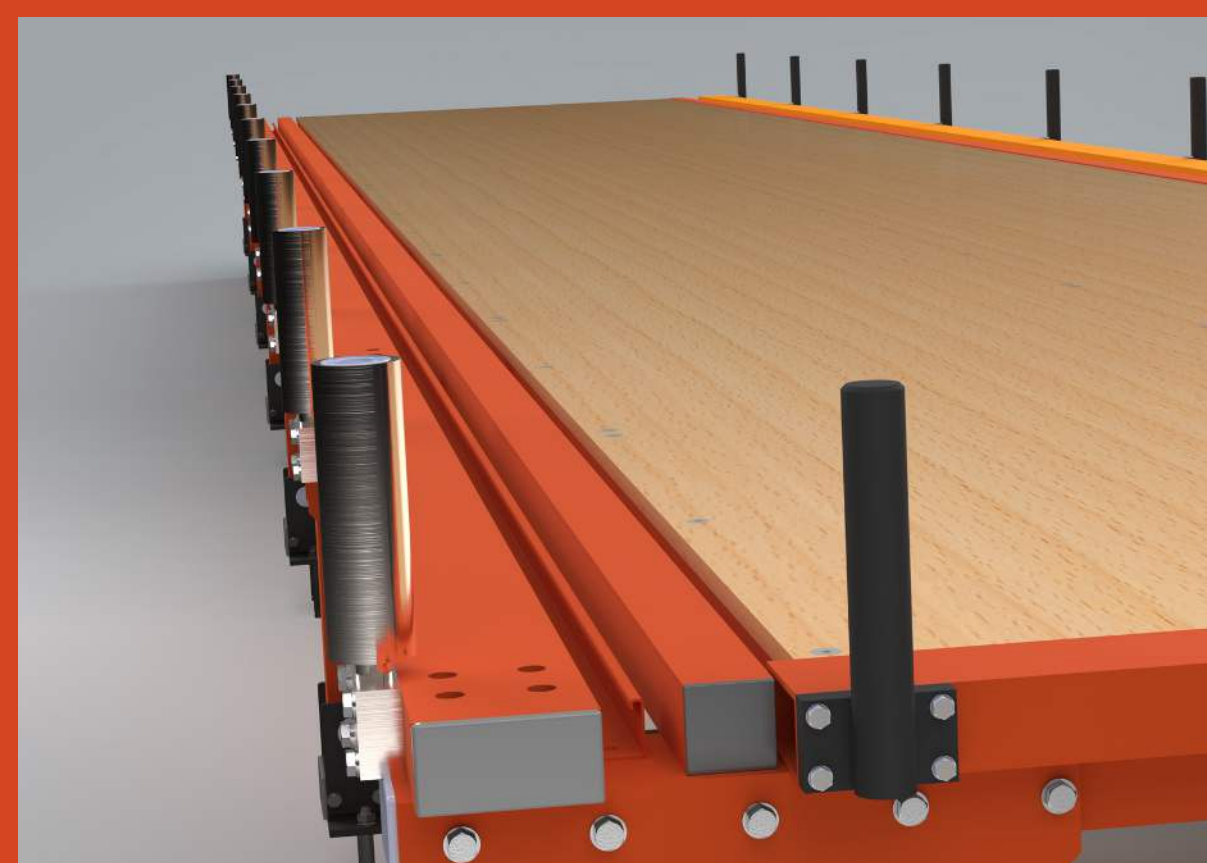

Ready to improve your  
production process?  
Contact our expert team today.